



Product Highlights:

- Various color solutions for different façade cladding design.
- Slim profile (23.5 mm width) for façade integration
- 24V DC power supply
- Wide beam angle output and 10-pixels-per-meter

Light is spectacular

ARCHISHAPE® Media Tube

An IP66-rated slim LED tube for any wall or façade media lighting application.

Light is OSRAM

Our Brands

traxon e:cue

OSRAM

ARCHISHAPE® Media Tube



ARCHISHAPE® Media Tube runs on 24V DC power supply, and fits into any wall, façade or media lighting application with tight installation requirements, while the wide beam angle output and 10-pixels-per-meter ensures a smooth illumination experience. This product greatly simplifies the lighting installation for building façades, media applications, bridges and more.

Advantages & Benefits

- Various colour solutions for different façade lighting design requirements (RGBW / RGB / Dynamic White / Mono)
- Slim profile (23.5mm width) and available in 300/500/1000mm lengths
- Wide beam angle output and 10-pixels-per-meter
- IP66


Applications

- Accent/border dynamic effect for long ribbons
- Low resolution media façade
- Stadiums, Bridges, Hospitality, Office Buildings




Dimensions

Direct View

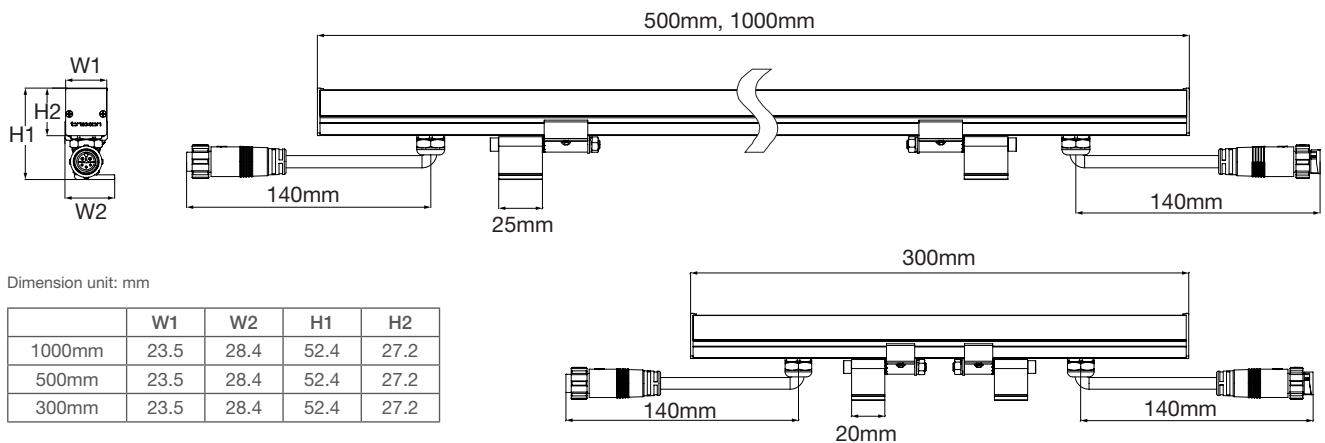

Diffused View

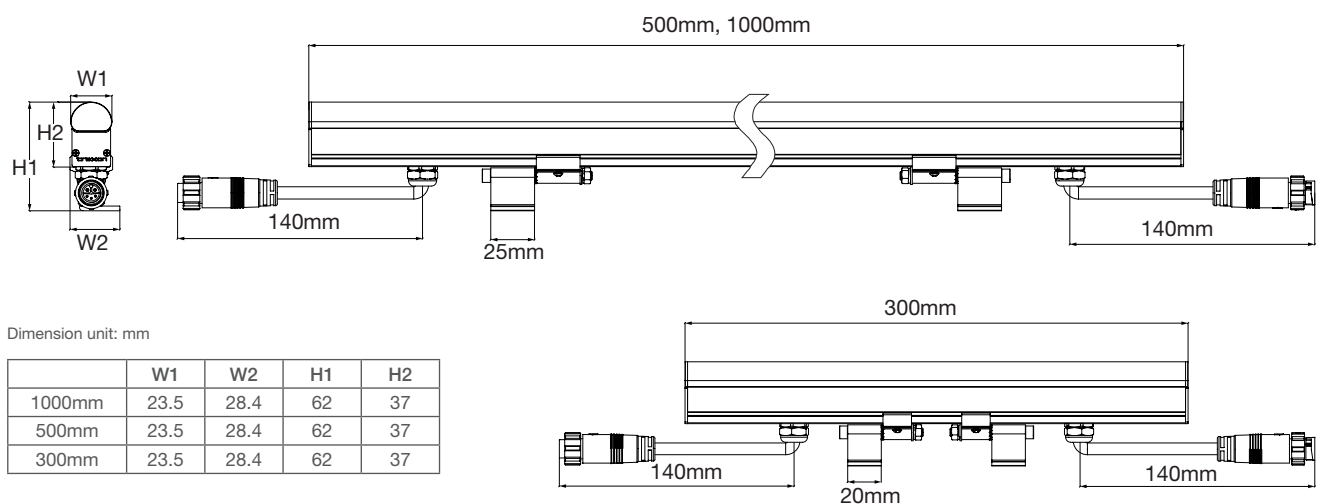


Traxon e:cue

Sales enquiry: Traxon.ecue.newsletter@osram.com
www.traxontechnologies.com


ARCHISHAPE® Media Tube

Photometrics

Direct View

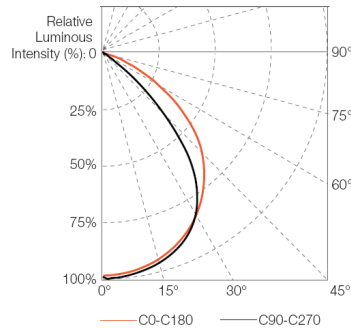

Diffused View

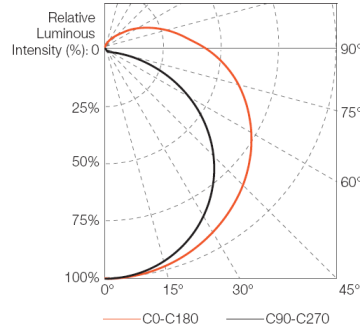

Product Reference

IC



Fixture

Product Reference	IC	Color	AC/DC	V	W	Beam angle	lm	I [in]	W [in]	h [in]	°C min-max	CONTROL
AS MEDIA TUBE RGBW 1000 10PXL DF R	AM435890055	RGBW	DC	24	14	110x170	420	1000	23.5	37	-30 to +50	DMX512
AS MEDIA TUBE RGBW 500 5PXL DF R	AM435900055	RGBW	DC	24	7	110x170	210	500	23.5	37	-30 to +50	DMX512
AS MEDIA TUBE RGBW 300 3PXL DF R	AM435910055	RGBW	DC	24	4.2	110x170	126	300	23.5	37	-30 to +50	DMX512
AS MEDIA TUBE RGBW 1000 10PXL CR	AM435980055	RGBW	DC	24	14	95	420	1000	23.5	27.2	-30 to +50	DMX512
AS MEDIA TUBE RGBW 500 5PXL CR	AM435990055	RGBW	DC	24	7	95	210	500	23.5	27.2	-30 to +50	DMX512
AS MEDIA TUBE RGBW 300 3PXL CR	AM436000055	RGBW	DC	24	4.2	95	126	300	23.5	27.2	-30 to +50	DMX512
AS MEDIA TUBE RGB 1000 10PXL DF R	AM435920055	RGB	DC	24	14	110x170	280	1000	23.5	37	-30 to +50	DMX512
AS MEDIA TUBE RGB 500 5PXL DF R	AM435930055	RGB	DC	24	7	110x170	140	500	23.5	37	-30 to +50	DMX512
AS MEDIA TUBE RGB 300 3PXL DF R	AM435940055	RGB	DC	24	4.2	110x170	84	300	23.5	37	-30 to +50	DMX512
AS MEDIA TUBE RGB 1000 10PXL CR	AM436010055	RGB	DC	24	14	95	350	1000	23.5	27.2	-30 to +50	DMX512
AS MEDIA TUBE RGB 500 5PXL CR	AM436020055	RGB	DC	24	7	95	175	500	23.5	27.2	-30 to +50	DMX512
AS MEDIA TUBE RGB 300 3PXL CR	AM436030055	RGB	DC	24	4.2	95	105	300	23.5	27.2	-30 to +50	DMX512
AS MEDIA TUBE DW 1000 10PXL DF R	AM435950055	Dynamic White	DC	24	14	110x170	602	1000	23.5	37	-30 to +50	DMX512
AS MEDIA TUBE DW 500 5PXL DF R	AM435960055	Dynamic White	DC	24	7	110x170	301	500	23.5	37	-30 to +50	DMX512
AS MEDIA TUBE DW 300 3PXL DF R	AM435970055	Dynamic White	DC	24	4.2	110x170	181	300	23.5	37	-30 to +50	DMX512
AS MEDIA TUBE DW 1000 10PXL CR	AM436040055	Dynamic White	DC	24	14	95	742	1000	23.5	27.2	-30 to +50	DMX512
AS MEDIA TUBE DW 500 5PXL CR	AM436050055	Dynamic White	DC	24	7	95	371	500	23.5	27.2	-30 to +50	DMX512
AS MEDIA TUBE DW 300 3PXL CR	AM436060055	Dynamic White	DC	24	4.2	95	223	300	23.5	27.2	-30 to +50	DMX512
AS MEDIA TUBE 865 1000 ONOFF DF R	AM436100055	6500K	DC	24	14	110x170	700	1000	23.5	37	-30 to +50	ON/OFF
AS MEDIA TUBE 865 500 ONOFF DF R	AM436110055	6500K	DC	24	7	110x170	350	500	23.5	37	-30 to +50	ON/OFF
AS MEDIA TUBE 865 300 ONOFF DF R	AM436120055	6500K	DC	24	4.2	110x170	210	300	23.5	37	-30 to +50	ON/OFF
AS MEDIA TUBE 830 1000 ONOFF DF R	AM436070055	3000K	DC	24	14	110x170	658	1000	23.5	37	-30 to +50	ON/OFF
AS MEDIA TUBE 830 500 ONOFF DF R	AM436080055	3000K	DC	24	7	110x170	329	500	23.5	37	-30 to +50	ON/OFF
AS MEDIA TUBE 830 300 ONOFF DF R	AM436090055	3000K	DC	24	4.2	110x170	197	300	23.5	37	-30 to +50	ON/OFF

Accessories

AS MT STARTER CABLE, 5-WIRE, 2M	AM437890055
AS MT INTER CABLE, 5-WIRE, 1M	AM437900055
AS MT END CAP WITH 120Ω TERMINATOR	AM437910055
AS MT Y-CABLE, 0.15M	AM437920055
AS MT STARTER CABLE, 2-WIRE, 2M	AM437930055
AS MT END CAP FOR ON/OFF	AM437940055
AS MT INTER CABLE, 2-WIRE, 1M	AM437950055

Technical data subject to variation and change without notice.

OSRAM copyrights reserved 2021. Subject to change without notice. Errors and omission excepted. All images used are for illustrative purposes only and not intended to reflect actual product performance.

Traxon e:cue

Sales enquiry: Traxon.ecue.newsletter@osram.com
www.traxontechnologies.com

