

e:touch 8"



e:touch 8"

With the e:touch 8" you have customizable control points for your lighting installation.

The capacitive touch screen allows a smooth selection of commands on the individualized display.

Running the SymphoTouch app, the e:touch 8" is a control input for e:cue SYMPHOLIGHT projects, enabling flexible and creative UI design concepts.

Polish your project at the user's touch point, using the wall mountable e:touch 8".

Highlights

- 8 inch touch screen
- Power-over-Ethernet
- Customizable UI (Buttons/Fader) via e:cue software
- Simple mounting in standard with in-wall fittings

Delivery scope

- e:cue e:touch 8"
- Mounting plate
- EU standard in-wall box
- e:cue SymphoTouch app pre-installed
- Safety instructions
- Welcome note

Identcode

CL24100000255

Product specifications


Dimensions (W x H x D)	124 x 200 x 11 mm / 4.88 x 7.87 x 0.43 in
Weight	340 g / 0.75 lb
Power supply	12 V DC, 50 Hz or PoE IEEE 802.3af on RJ45
Power consumption	24 W @ 12 V DC 13 W @ PoE
Operating temperature	-10 ... 50 °C / 14 ... 122 °F
Storage temperature	15 ... 45 °C / 59 ... 113 °F
Op. / Stor. humidity	0 ... 75% RH, non-condensing
Protection class	IP20
Installation	Indoor installation only
Mounting	Wall mount on standard in-wall mounted boxes
Certificates	CE, UKCA, RoHS

Interface specifications

Display size	8 inch
Resolution	800 x 1280
Brightness	300 nt
System interface	1 x e:net / Ethernet 10/100 Mbit/s, RJ45
Sensors	Proximity sensor
Outputs	Speaker
User interfaces	Customizable UI (Buttons/Fader) via e:cue software


Dimensions

All measures in mm

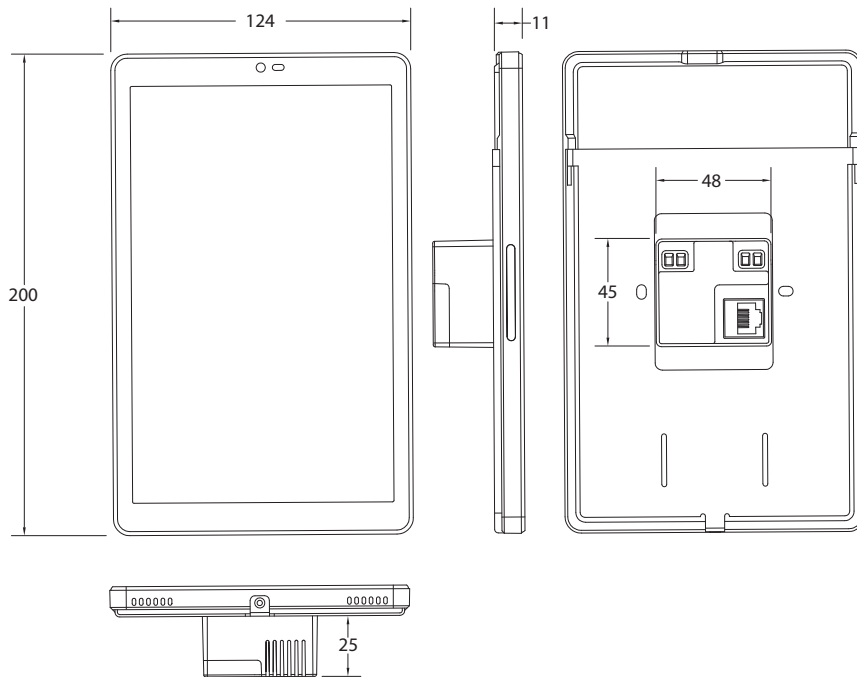

System diagram

- A) Ethernet with PoE (power over ethernet)
- B) RS-485

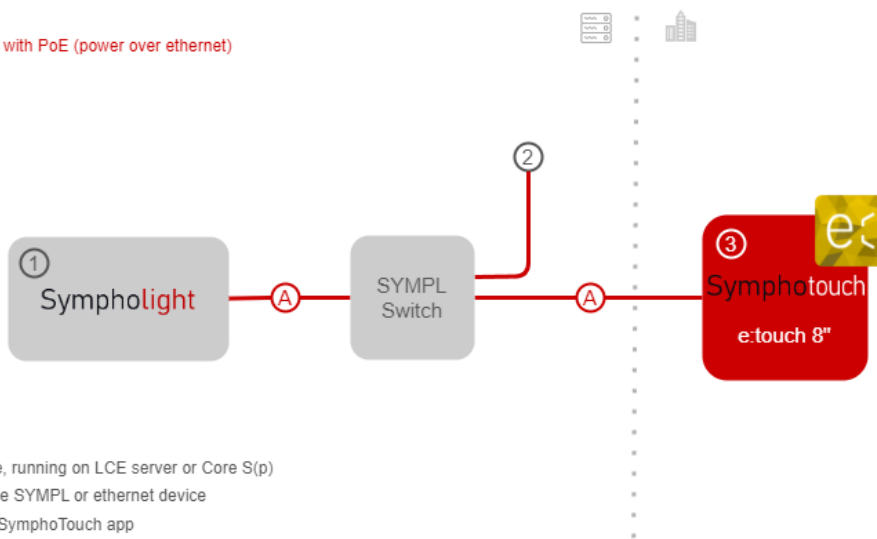

- 1) Software, running on LCE server or Core S(p)
- 2) any e:cue SYMPL or ethernet device
- 3) running SymphoTouch app

