



Product Highlights:

- High quality PMMA diffuser
- ON/OFF and microwave sensor versions
- Maximum detection distance of the microwave sensor: 6m, maximum detection angle: 120°
- 50,000hrs lifetime
- IP20 (Front housing IP44)

Light is classic

LEDCOMFO® Ceiling V3

An ideal indoor ceiling lighting solution with classic industrial design and uniform illumination.

Light is OSRAM

Our Brands

traxon e:cue

OSRAM

LEDCOMFO® Ceiling V3




LEDCOMFO® Ceiling V3 is an ideal indoor ceiling lighting solution with classic industrial design and uniform illumination. It also has microwave sensor version which can enable intelligent control and save more energy.

Applications

- Commercial areas
- Corridors and walkways
- Public areas
- Stairwells

Dimensions

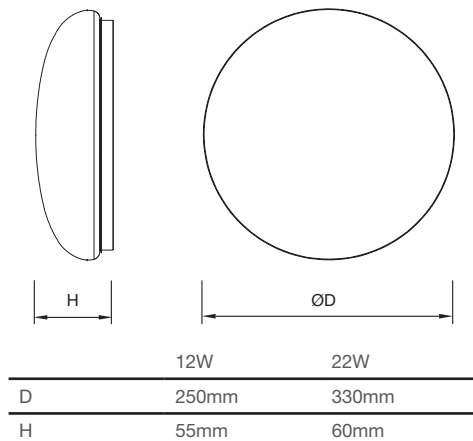

Advantages & Benefits

Comfort light with modern design

- Imported LED provides consistent color temperature
- High quality PMMA diffuser brings high uniformity
- Classic and artistic industrial design

Reliable and easy to install

- Pre-installed terminals for easy installation


Outstanding light performance

- IP20 (Front housing IP44)
- Maximum detection distance of the microwave sensor: 6m, maximum detection angle: 120°
- 50,000hrs lifetime

Full solution with microwave sensor control

- Power options 12W/22W
- CCT 3000K/4000K/6500K
- ON/OFF and microwave sensor versions

Photometrics

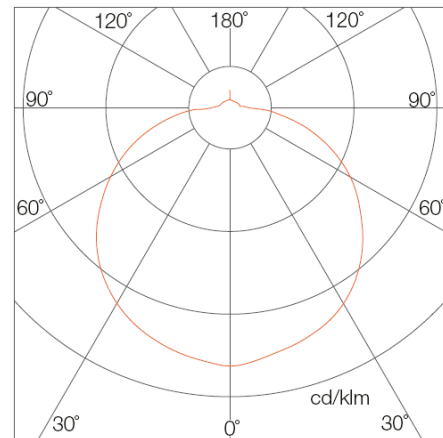

Product Reference

Ordering Code (EAN40)



Product Reference	Ordering Code (EAN40)	Color	V	W	Hz	Beam Angle	K	lm	d [mm]	h [mm]	Packaging
LCM CEIL V3 12W 830 6X1 OSRAM	4062172262422	Warm White	220-240	12	50/60	120	3000	1200	250	55	6
LCM CEIL V3 12W 840 6X1 OSRAM	4062172262446	Neutral White	220-240	12	50/60	120	4000	1200	250	55	6
LCM CEIL V3 12W 865 6X1 OSRAM	4062172262460	Cold White	220-240	12	50/60	120	6500	1200	250	55	6
LCM CEIL V3 22W 830 6X1 OSRAM	4062172262484	Warm White	220-240	22	50/60	120	3000	2200	330	60	6
LCM CEIL V3 22W 840 6X1 OSRAM	4062172262507	Neutral White	220-240	22	50/60	120	4000	2200	330	60	6
LCM CEIL V3 22W 865 6X1 OSRAM	4062172262521	Cold White	220-240	22	50/60	120	6500	2200	330	60	6
LCM CEIL V3 12W 830 MW 6X1 OSRAM	4062172262545	Warm White	220-240	12	50/60	120	3000	1200	250	55	6
LCM CEIL V3 12W 840 MW 6X1 OSRAM	4062172262569	Neutral White	220-240	12	50/60	120	4000	1200	250	55	6
LCM CEIL V3 12W 865 MW 6X1 OSRAM	4062172262583	Cold White	220-240	12	50/60	120	6500	1200	250	55	6
LCM CEIL V3 22W 830 MW 6X1 OSRAM	4062172262606	Warm White	220-240	22	50/60	120	3000	2200	330	60	6
LCM CEIL V3 22W 840 MW 6X1 OSRAM	4062172262620	Neutral White	220-240	22	50/60	120	4000	2200	330	60	6
LCM CEIL V3 22W 865 MW 6X1 OSRAM	4062172262644	Cold White	220-240	22	50/60	120	6500	2200	330	60	6

Technical data subject to variation and change without notice.

Traxon e:cue

Sales enquiry: Traxon.ecue.newsletter@osram.com

www.traxontechnologies.com | www.osram.com.cn/lis | www.osram.com/ecue

