



Product Highlights:

- Die casting aluminum housing with tempered glass cover
- Power range: 30W/45W/95W/160W/190W
- Up to 105 lm/W system efficacy and CRI>80
- Symmetrical and asymmetrical optics
- IP66 & IK07


Light is versatile

LEDCOMFO® Floodlight V3

A cost effective and reliable flood lighting for outdoor applications.

Light is **OSRAM**

LED COMFO® Floodlight V3

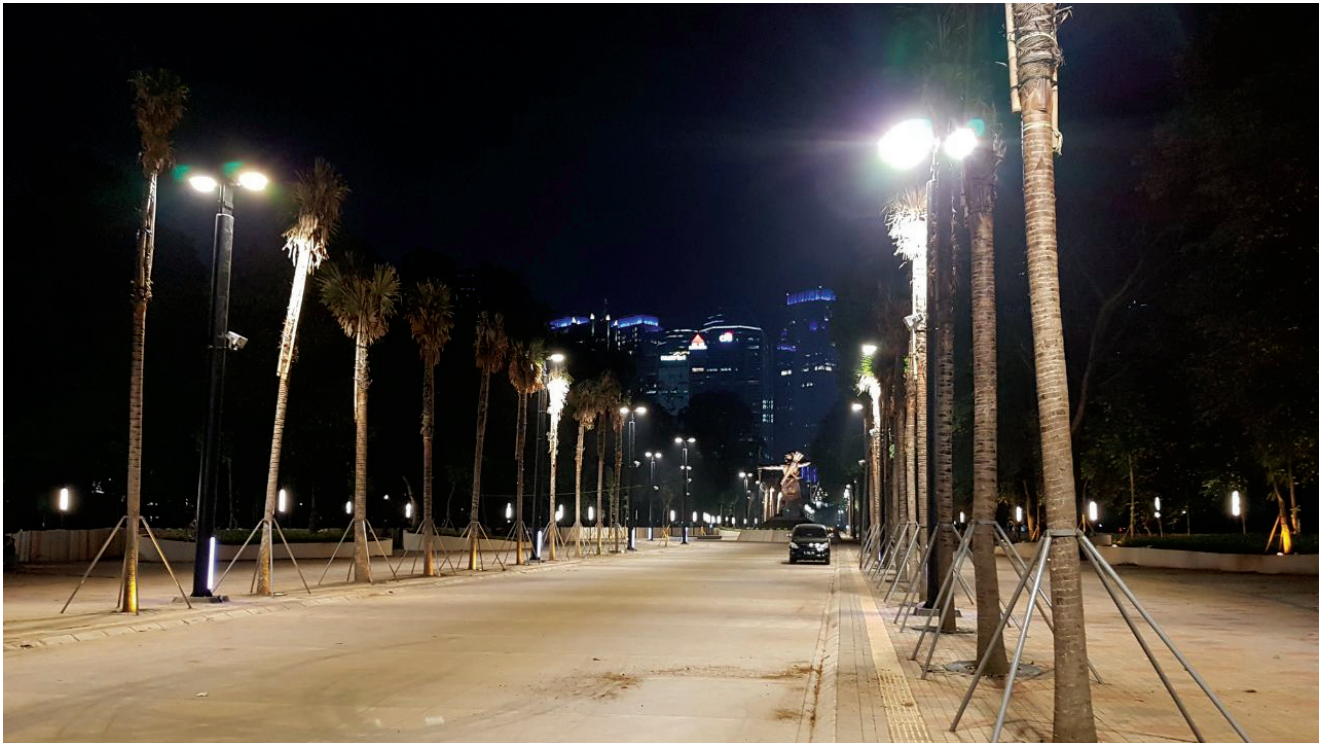

LED COMFO® Flood V3 is a cost effective and reliable flood lighting. 30W and 45W versions with frosted glass cover, wide lighting beam angle and soft lighting surface. 95W, 160W, and 190W versions with Symmetric and Asymmetric lighting distributions thanks to the well-designed lens, good glare control with high uniformity for outdoor area lighting and billboard illumination. Robust die-casting aluminum housing, steel bracket, IP66, IK07 for the harsh outdoor environment lighting applications.

Advantages & Benefits

Robust and reliable

- Die casting aluminum housing
- High impact resistance with tempered glass, IK07
- High protection level for outdoor use, IP66
- Patented Anti-siphon mechanism waterproof design ensure the IP protection
- 30000 hours lifetime

Precise and efficient

- Well designed lens with symmetrical and asymmetrical lighting distributions for various applications
- Adjustable bracket with angle indicator for precise lighting direction adjustment
- Top brand LED ensure the consistent color temperature
- Up to 105 lm/W system efficacy and CRI>80

Full options for different applications


- Power range: 30W/45W/95W/160W/190W
- 2 color temperatures options: 4000K and 5700K (3000K available on request)
- Symmetrical and asymmetrical optics

Applications

- Outdoor area flood lighting
- Outdoor billboards lighting
- Logo illuminations
- Other public or industrial areas


LED COMFO® Floodlight V3

Dimensions

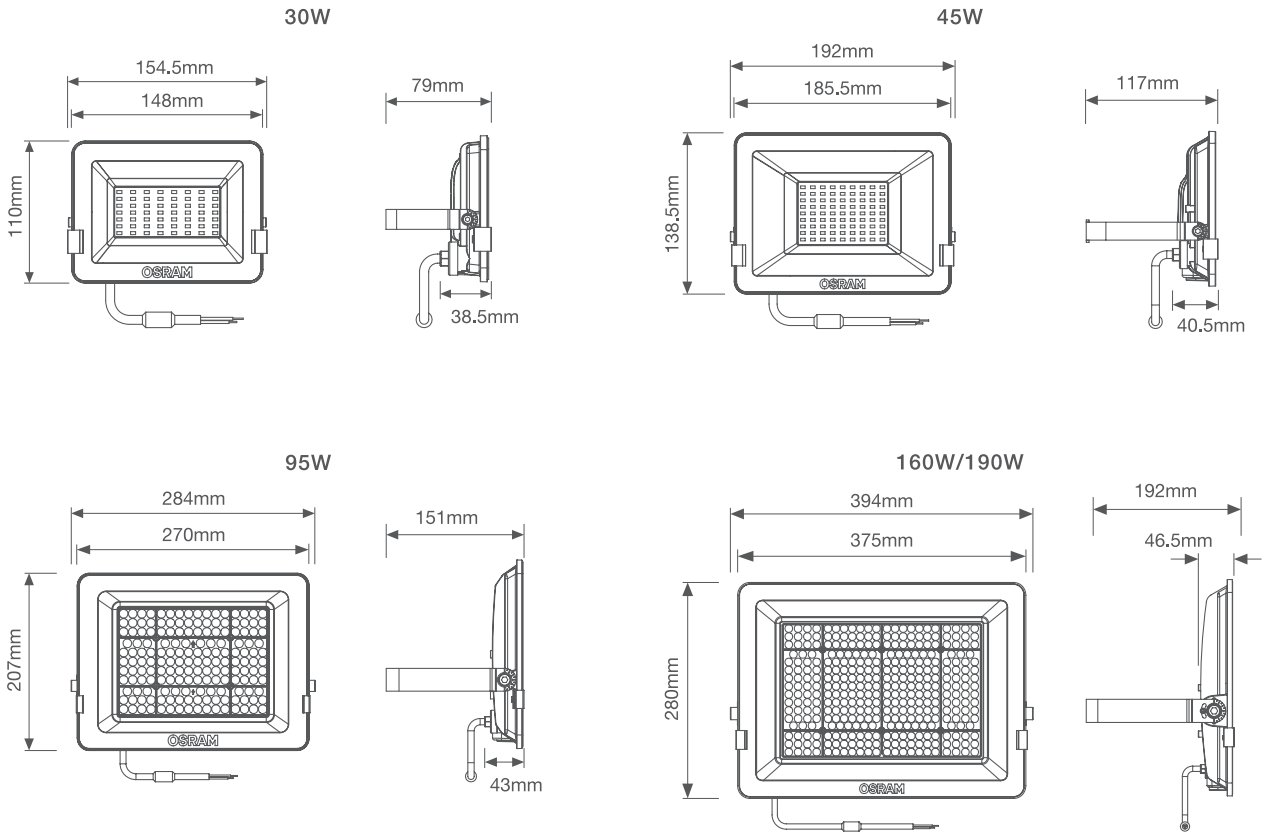





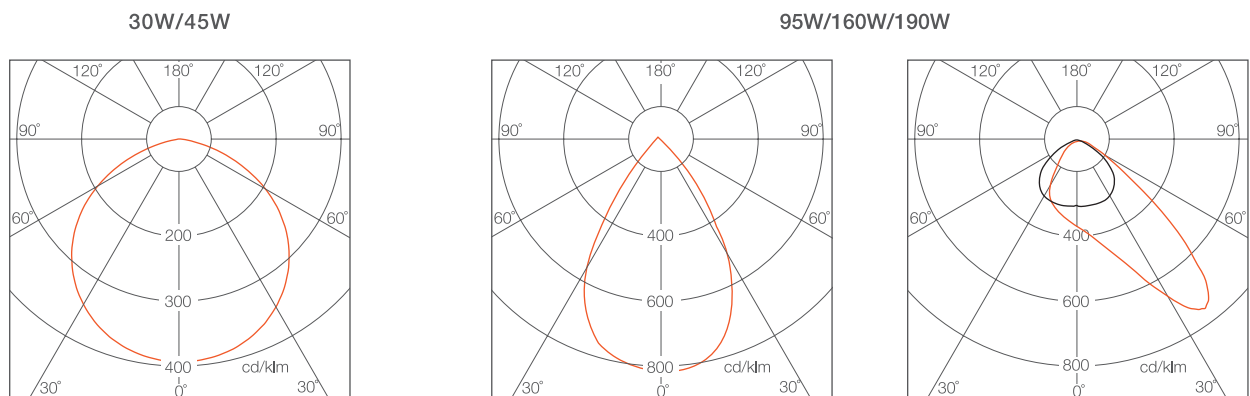

	30W	45W	95W	160W	190W
L	154mm	192mm	284mm	394mm	394mm
W	125mm	189mm	261mm	336mm	336mm
H	39mm	41mm	44mm	46mm	46mm

Photometrics



LEDKOMFO® Floodlight V3

Product Reference	Ordering Code (EAN40)		V	W	Hz	K	lm					
LEDKOMFO FL V3 30W 840 SY 12X1 OSRAM	4062172058025	Neutral white	220-240	30	50/60	4000	2850	100	154	125	39	12
LEDKOMFO FL V3 30W 857 SY 12X1 OSRAM	4062172058049	Cold white	220-240	30	50/60	5700	2850	100	154	125	39	12
LEDKOMFO FL V3 45W 840 SY 5X1 OSRAM	4062172058063	Neutral white	220-240	45	50/60	4000	4725	100	192	189	41	5
LEDKOMFO FL V3 45W 857 SY 5X1 OSRAM	4062172058087	Cold white	220-240	45	50/60	5700	4725	100	192	189	41	5
LEDKOMFO FL V3 95W 840 SY 5X1 OSRAM	4062172058100	Neutral white	220-240	95	50/60	4000	9975	60	284	261	44	5
LEDKOMFO FL V3 95W 857 SY 5X1 OSRAM	4062172058124	Cold white	220-240	95	50/60	5700	9975	60	284	261	44	5
LEDKOMFO FL V3 160W 840 SY 3X1 OSRAM	4062172058148	Neutral white	220-240	160	50/60	4000	16800	60	394	336	46	3
LEDKOMFO FL V3 160W 857 SY 3X1 OSRAM	4062172058162	Cold white	220-240	160	50/60	5700	16800	60	394	336	46	3
LEDKOMFO FL V3 190W 840 SY 3X1 OSRAM	4062172058186	Neutral white	220-240	190	50/60	4000	19950	60	394	336	46	3
LEDKOMFO FL V3 190W 857 SY 3X1 OSRAM	4062172058209	Cold white	220-240	190	50/60	5700	19950	60	394	336	46	3
LEDKOMFO FL V3 95W 840 AS 3X1 OSRAM	4062172058223	Neutral white	220-240	95	50/60	4000	9975	110 x 40	284	261	44	3
LEDKOMFO FL V3 95W 857 AS 3X1 OSRAM	4062172058247	Cold white	220-240	95	50/60	5700	9975	110 x 40	284	261	44	3
LEDKOMFO FL V3 160W 840 AS 3X1 OSRAM	4062172058261	Neutral white	220-240	160	50/60	4000	16800	110 x 40	394	336	46	3
LEDKOMFO FL V3 160W 857 AS 3X1 OSRAM	4062172058285	Cold white	220-240	160	50/60	5700	16800	110 x 40	394	336	46	3
LEDKOMFO FL V3 190W 840 AS 3X1 OSRAM	4062172058308	Neutral white	220-240	190	50/60	4000	19950	110 x 40	394	336	46	3
LEDKOMFO FL V3 190W 857 AS 3X1 OSRAM	4062172058322	Cold white	220-240	190	50/60	5700	19950	110 x 40	394	336	46	3

Technical data subject to variation and change without notice.

OSRAM copyrights reserved 2019. Subject to change without notice. Errors and omission excepted. All images used are for illustrative purposes only and not intended to reflect actual product performance.

Traxon e:cue

Sales enquiry: Traxon.ecue.newsletter@osram.com

www.traxontechnologies.com

