

**Product Highlights:**

- Strong frame with extrusion aluminum
- Without flicker
- 50,000 hours of lumen maintenance - L70@25°C

# Light is diversifiable

## LEDCOMFO® Panel V3

Designed for commercial area with high lumen, efficacy and long lifetime

**Light is OSRAM**

Our Brands

traxon e:cue

**OSRAM**

## LEDCOMFO® Panel V3



LEDCOMFO® Panel V3 is designed for commercial projects with its high lumen package, high efficacy and long lifetime. Multiple product sizes and diversified mounting solutions enable this product family to easily fit into different kinds of installation environments.

### Advantages & Benefits

---

#### Simple shape with stable quality

- Strong frame with extrusion aluminum
- 1KV surge protection

#### Outstanding light performance

- Without flicker
- UGR<22
- Up to 120 lm/W
- 50,000 hours of lumen maintenance - L70@25°C

#### Whole range for all applications

- Size: 2ft x 2ft, 4ft x 1ft, 4ft x 2ft
- Power: 32W, 56W
- CCT: 4000K/5700K/6500K
- Recessed, suspended and integrated ceiling mounting

### Applications

---


- Offices
- Schools
- Banks
- Stores
- Public areas

## LED COMFO® Panel V3


### Dimensions

#### Recessed / Suspended Mounting


2ft x 2ft



4ft x 1ft




4ft x 2ft

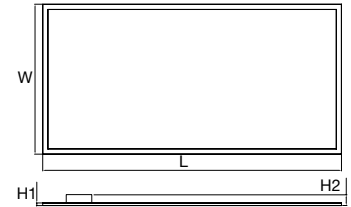


	2ft x 2ft	4ft x 1ft	4ft x 2ft
<b>L</b>	595mm	1195mm	1195mm
<b>W</b>	595mm	295mm	595mm
<b>H1</b>	9mm	9mm	10mm
<b>H2</b>	37mm	37mm	38mm

#### Integrated Ceiling Mounting


2ft x 2ft



4ft x 1ft




4ft x 2ft

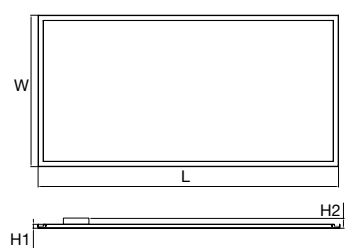




	2ft x 2ft	4ft x 1ft	4ft x 2ft
<b>L</b>	600mm	1200mm	1200mm
<b>W</b>	600mm	300mm	600mm
<b>H1</b>	20mm	20mm	20mm
<b>H2</b>	36.92mm	36.92mm	36.92mm

### Photometrics

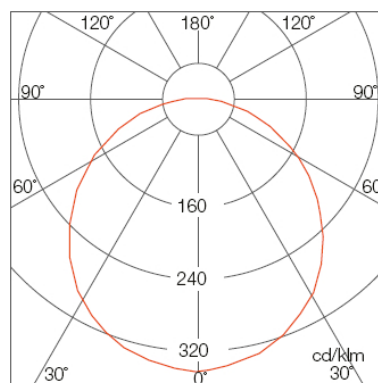Light Distribution Curve



## LEDCOMFO® Panel V3

Product Reference	Ordering Code (EAN40)		V	W	Hz		K	lm	$\frac{b}{[mm]}$	$\frac{l}{[mm]}$	$\frac{h}{[mm]}$	
LCM PL V3 0606 LP 840 VS4 OSRAM	4062172293310	Warm white	220-240	32	50/60	4000	3840	595	595	9	4	4
LCM PL V3 0606 LP 857 VS4 OSRAM	4062172293334	Neutral white	220-240	32	50/60	5700	3840	595	595	9	4	4
LCM PL V3 0606 LP 865 VS4 OSRAM	4062172293358	Cold white	220-240	32	50/60	6500	3840	595	595	9	4	4
LCM PL V3 0312 LP 840 VS4 OSRAM	4062172293372	Warm white	220-240	32	50/60	4000	3840	1195	295	9	4	4
LCM PL V3 0312 LP 857 VS4 OSRAM	4062172293396	Neutral white	220-240	32	50/60	5700	3840	1195	295	9	4	4
LCM PL V3 0312 LP 865 VS4 OSRAM	4062172293419	Cold white	220-240	32	50/60	6500	3840	1195	295	9	4	4
LCM PL V3 0612 HP 840 VS4 OSRAM	4062172293433	Warm white	220-240	56	50/60	4000	6720	1195	595	10	4	4
LCM PL V3 0612 HP 857 VS4 OSRAM	4062172293457	Neutral white	220-240	56	50/60	5700	6720	1195	595	10	4	4
LCM PL V3 0612 HP 865 VS4 OSRAM	4062172293471	Cold white	220-240	56	50/60	6500	6720	1195	595	10	4	4
LCM PL V3 0606 LP 840 IT VS4 OSRAM	4062172293495	Warm white	220-240	32	50/60	4000	3840	600	600	20	4	4
LCM PL V3 0606 LP 857 IT VS4 OSRAM	4062172293518	Neutral white	220-240	32	50/60	5700	3840	600	600	20	4	4
LCM PL V3 0606 LP 865 IT VS4 OSRAM	4062172293532	Cold white	220-240	32	50/60	6500	3840	600	600	20	4	4
LCM PL V3 0312 LP 840 IT VS4 OSRAM	4062172293556	Warm white	220-240	32	50/60	4000	3840	1200	300	20	4	4
LCM PL V3 0312 LP 857 IT VS4 OSRAM	4062172293570	Neutral white	220-240	32	50/60	5700	3840	1200	300	20	4	4
LCM PL V3 0312 LP 865 IT VS4 OSRAM	4062172293594	Cold white	220-240	32	50/60	6500	3840	1200	300	20	4	4
LCM PL V3 0612 HP 840 IT VS4 OSRAM	4062172293617	Warm white	220-240	56	50/60	4000	6720	1200	600	20	4	4
LCM PL V3 0612 HP 857 IT VS4 OSRAM	4062172293631	Neutral white	220-240	56	50/60	5700	6720	1200	600	20	4	4
LCM PL V3 0612 HP 865 IT VS4 OSRAM	4062172293655	Cold white	220-240	56	50/60	6500	6720	1200	600	20	4	4

Technical data subject to variation and change without notice.

Traxon e:cue

Sales enquiry: [Traxon.ecue.newsletter@osram.com](mailto:Traxon.ecue.newsletter@osram.com)

[www.traxontechnologies.com](http://www.traxontechnologies.com)

