



Product Highlights:

- Strong frame with extrusion aluminum
- Without flicker, Low glare
- 50,000 hours of lumen maintenance - L70@25°C
- Dali & ON/OFF Version

Light is optimization

Simplitz® Panel V3

An economic and energy-saving lighting solutions for variety of applications.

Light is OSRAM

Our Brands

traxon e:cue

OSRAM

Simplitz® Panel V3



Simplitz® Panel V3 is an economic and energy-saving replacement for traditional office panel / louvers. With three sizes and three different ways of mounting, it perfectly fits a variety of applications to provide quality general lighting that enhances sense of well-being.

Advantages & Benefits

Simple shape with stable quality

- Strong frame with extrusion aluminum
- Fingerprint proof solution in backplane

Outstanding light performance

- Without flicker, Low glare
- UGR<19
- Up to 125 lm/W
- L70@25°C- 50,000 hours of lumen maintenance

Whole range for all applications

- Size 2ft x 2ft, 4ft x 1ft, 4ft x 2ft
- Power 32W, 56W
- Control ON&OFF, DALI
- CCT 4000K/5700K/6500K
- Recessed, suspended and integrated ceiling mounting

Applications


- Offices
- Schools
- Banks
- Stores
- Public areas

Simplitz® Panel V3


Dimensions

Recessed / Suspended Mounting


2ft x 2ft



4ft x 1ft




4ft x 2ft

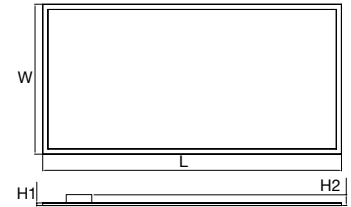


	2ft x 2ft	4ft x 1ft	4ft x 2ft
L	595mm	1195mm	1195mm
W	595mm	295mm	595mm
H1	9.4mm	9.4mm	10.5mm
H2@ON/OFF	37.4mm	37.4mm	38.5mm
H2@DALI	42.4mm	42.4mm	43.5mm

Integrated Ceiling Mounting


2ft x 2ft



4ft x 1ft




4ft x 2ft

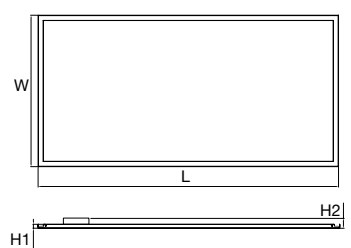







	2ft x 2ft	4ft x 1ft	4ft x 2ft
L	600mm	1200mm	1200mm
W	600mm	300mm	600mm
H1	15.5mm	15.5mm	15.5mm
H2@ON/OFF	35.3mm	35.3mm	35.3mm
H2@DALI	40.3mm	40.3mm	40.3mm

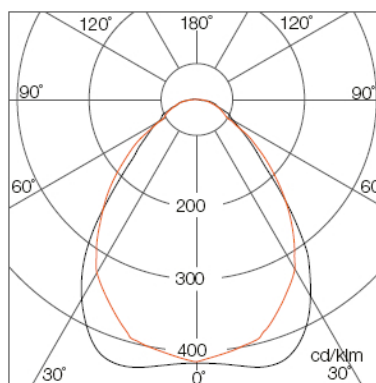Photometrics

Light Distribution Curve



Simplitz® Panel V3

Product Reference	Ordering Code (EAN40)		V	W	Hz		K	lm				
SIM PL V3 0606 LP 840 VS4 OSRAM	4062172291187	Warm white	220-240	32	50/60	90	4000	4000	595	595	9.4	4
SIM PL V3 0606 LP 857 VS4 OSRAM	4062172291200	Neutral white	220-240	32	50/60	90	5700	4000	595	595	9.4	4
SIM PL V3 0606 LP 865 VS4 OSRAM	4062172291224	Cold white	220-240	32	50/60	90	6500	4000	595	595	9.4	4
SIM PL V3 0312 LP 840 VS4 OSRAM	4062172291248	Warm white	220-240	32	50/60	90	4000	4000	1195	295	9.4	4
SIM PL V3 0312 LP 857 VS4 OSRAM	4062172291262	Neutral white	220-240	32	50/60	90	5700	4000	1195	295	9.4	4
SIM PL V3 0312 LP 865 VS4 OSRAM	4062172291286	Cold white	220-240	32	50/60	90	6500	4000	1195	295	9.4	4
SIM PL V3 0606 HP 840 VS4 OSRAM	4062172291323	Warm white	220-240	56	50/60	90	4000	7000	595	595	9.4	4
SIM PL V3 0606 HP 857 VS4 OSRAM	4062172291347	Neutral white	220-240	56	50/60	90	5700	7000	595	595	9.4	4
SIM PL V3 0606 HP 865 VS4 OSRAM	4062172291361	Cold white	220-240	56	50/60	90	6500	7000	595	595	9.4	4
SIM PL V3 0312 HP 840 VS4 OSRAM	4062172291408	Warm white	220-240	56	50/60	90	4000	7000	1195	295	9.4	4
SIM PL V3 0312 HP 857 VS4 OSRAM	4062172291422	Neutral white	220-240	56	50/60	90	5700	7000	1195	295	9.4	4
SIM PL V3 0312 HP 865 VS4 OSRAM	4062172291446	Cold white	220-240	56	50/60	90	6500	7000	1195	295	9.4	4
SIM PL V3 0612 HP 840 VS4 OSRAM	4062172291460	Warm white	220-240	56	50/60	90	4000	7000	1195	595	10.5	4
SIM PL V3 0612 HP 857 VS4 OSRAM	4062172291484	Neutral white	220-240	56	50/60	90	5700	7000	1195	595	10.5	4
SIM PL V3 0612 HP 865 VS4 OSRAM	4062172291507	Cold white	220-240	56	50/60	90	6500	7000	1195	595	10.5	4
SIM PL V3 0606 LP 840 IT VS4 OSRAM	4062172291521	Warm white	220-240	32	50/60	90	4000	4000	595	595	9.4	4
SIM PL V3 0606 LP 857 IT VS4 OSRAM	4062172291545	Neutral white	220-240	32	50/60	90	5700	4000	595	595	9.4	4
SIM PL V3 0606 LP 865 IT VS4 OSRAM	4062172291569	Cold white	220-240	32	50/60	90	6500	4000	595	595	9.4	4
SIM PL V3 0312 LP 840 IT VS4 OSRAM	4062172291583	Warm white	220-240	32	50/60	90	4000	4000	1195	295	9.4	4
SIM PL V3 0312 LP 857 IT VS4 OSRAM	4062172291606	Neutral white	220-240	32	50/60	90	5700	4000	1195	295	9.4	4
SIM PL V3 0312 LP 865 IT VS4 OSRAM	4062172291620	Cold white	220-240	32	50/60	90	6500	4000	1195	295	9.4	4
SIM PL V3 0606 HP 840 IT VS4 OSRAM	4062172291644	Warm white	220-240	56	50/60	90	4000	7000	595	595	9.4	4
SIM PL V3 0606 HP 857 IT VS4 OSRAM	4062172291668	Neutral white	220-240	56	50/60	90	5700	7000	595	595	9.4	4
SIM PL V3 0606 HP 865 IT VS4 OSRAM	4062172291729	Cold white	220-240	56	50/60	90	6500	7000	595	595	9.4	4
SIM PL V3 0312 HP 840 IT VS4 OSRAM	4062172291743	Warm white	220-240	56	50/60	90	4000	7000	1195	295	9.4	4
SIM PL V3 0312 HP 857 IT VS4 OSRAM	4062172291828	Neutral white	220-240	56	50/60	90	5700	7000	1195	295	9.4	4
SIM PL V3 0312 HP 865 IT VS4 OSRAM	4062172291842	Cold white	220-240	56	50/60	90	6500	7000	1195	295	9.4	4
SIM PL V3 0612 HP 840 IT VS4 OSRAM	4062172291866	Warm white	220-240	56	50/60	90	4000	7000	1195	595	10.5	4
SIM PL V3 0612 HP 857 IT VS4 OSRAM	4062172291880	Neutral white	220-240	56	50/60	90	5700	7000	1195	595	10.5	4
SIM PL V3 0612 HP 865 IT VS4 OSRAM	4062172291903	Cold white	220-240	56	50/60	90	6500	7000	1195	595	10.5	4
SIM PL V3 0606 LP 840 DA VS4 OSRAM	4062172291927	Warm white	220-240	32	50/60	90	4000	4000	595	595	9.4	4
SIM PL V3 0606 LP 857 DA VS4 OSRAM	4062172291941	Neutral white	220-240	32	50/60	90	5700	4000	595	595	9.4	4
SIM PL V3 0606 LP 865 DA VS4 OSRAM	4062172291965	Cold white	220-240	32	50/60	90	6500	4000	595	595	9.4	4
SIM PL V3 0312 LP 840 DA VS4 OSRAM	4062172292023	Warm white	220-240	32	50/60	90	4000	4000	1195	295	9.4	4
SIM PL V3 0312 LP 857 DA VS4 OSRAM	4062172292047	Neutral white	220-240	32	50/60	90	5700	4000	1195	295	9.4	4
SIM PL V3 0312 LP 865 DA VS4 OSRAM	4062172292061	Cold white	220-240	32	50/60	90	6500	4000	1195	295	9.4	4
SIM PL V3 0606 HP 840 DA VS4 OSRAM	4062172292085	Warm white	220-240	56	50/60	90	4000	7000	595	595	9.4	4
SIM PL V3 0606 HP 857 DA VS4 OSRAM	4062172292108	Neutral white	220-240	56	50/60	90	5700	7000	595	595	9.4	4
SIM PL V3 0606 HP 865 DA VS4 OSRAM	4062172292122	Cold white	220-240	56	50/60	90	6500	7000	595	595	9.4	4
SIM PL V3 0312 HP 840 DA VS4 OSRAM	4062172292146	Warm white	220-240	56	50/60	90	4000	7000	1195	295	9.4	4
SIM PL V3 0312 HP 857 DA VS4 OSRAM	4062172292160	Neutral white	220-240	56	50/60	90	5700	7000	1195	295	9.4	4
SIM PL V3 0312 HP 865 DA VS4 OSRAM	4062172292184	Cold white	220-240	56	50/60	90	6500	7000	1195	295	9.4	4
SIM PL V3 0612 HP 840 DA VS4 OSRAM	4062172292207	Warm white	220-240	56	50/60	90	4000	7000	1195	595	10.5	4
SIM PL V3 0612 HP 857 DA VS4 OSRAM	4062172292221	Neutral white	220-240	56	50/60	90	5700	7000	1195	595	10.5	4
SIM PL V3 0612 HP 865 DA VS4 OSRAM	4062172292245	Cold white	220-240	56	50/60	90	6500	7000	1195	595	10.5	4

Technical data subject to variation and change without notice.

OSRAM copyrights reserved 2022. Subject to change without notice. Errors and omission excepted. All images used are for illustrative purposes only and not intended to reflect actual product performance.

Traxon e:cue

Sales enquiry: Traxon.ecue.newsletter@osram.com

www.traxontechonologies.com

