



Product Highlights:

- Smart City compatibility for modern city image
- Power range from 30W to 270W
- IP66, IK09 and Long lifetime up to 50,000hrs@35°C, L70
- Tool-free luminaire opening and wiring
- Replaceable driver

Light is connectivity Simplitz[®] Street Light

A comprehensive and powerful outdoor luminaire for all road lighting applications.

Light is OSRAM

OSRAM

Simplitz® Street Light



Simplitz® Street Light, a versatile and powerful outdoor luminaire for street lighting applications. This highly efficient product family provides Smart City compatibility and elegant identity for modern cities, with lower total cost of ownership and quick payback on investment. With high efficacy, high reliability, low maintenance and excellent optic performance, it brings safety and well-being for various road illuminations. Simplitz® Street Light is an ideal solution for residential paths, collection roads and multi-lane highways.

Advantages & Benefits

Smart City compatibility

- Smart City connectivity with NEMA socket
- 1-10V, Step dimming and DALI dimming versions available
- Compatible with SpaceWing™ street light control system

Comprehensive product range for various applications

- Power range from 30W to 270W
- Choice of CCT 3000K/4000K/5700K
- PC lens version

High reliable and durable


- Long lifetime 50,000 hours @35°C, L70
- Robust die-cast housing
- IP66 and IK09
- Operating temperature: –30°C to +55°C

User-friendly installation and maintenance

- Tool-free luminaire opening and wiring
- 0-15° tilt angle adjustable
- Separate spigot enables side-entry and post-top installation
- Replaceable driver


Applications

- Street light illuminations
- Residential paths
- Parking lots
- Industrial roads

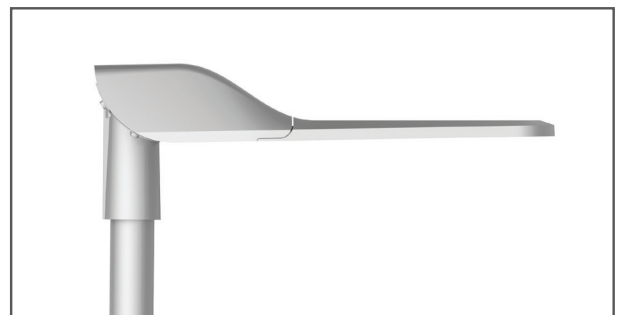



Simplitz® Street Light

Dimensions

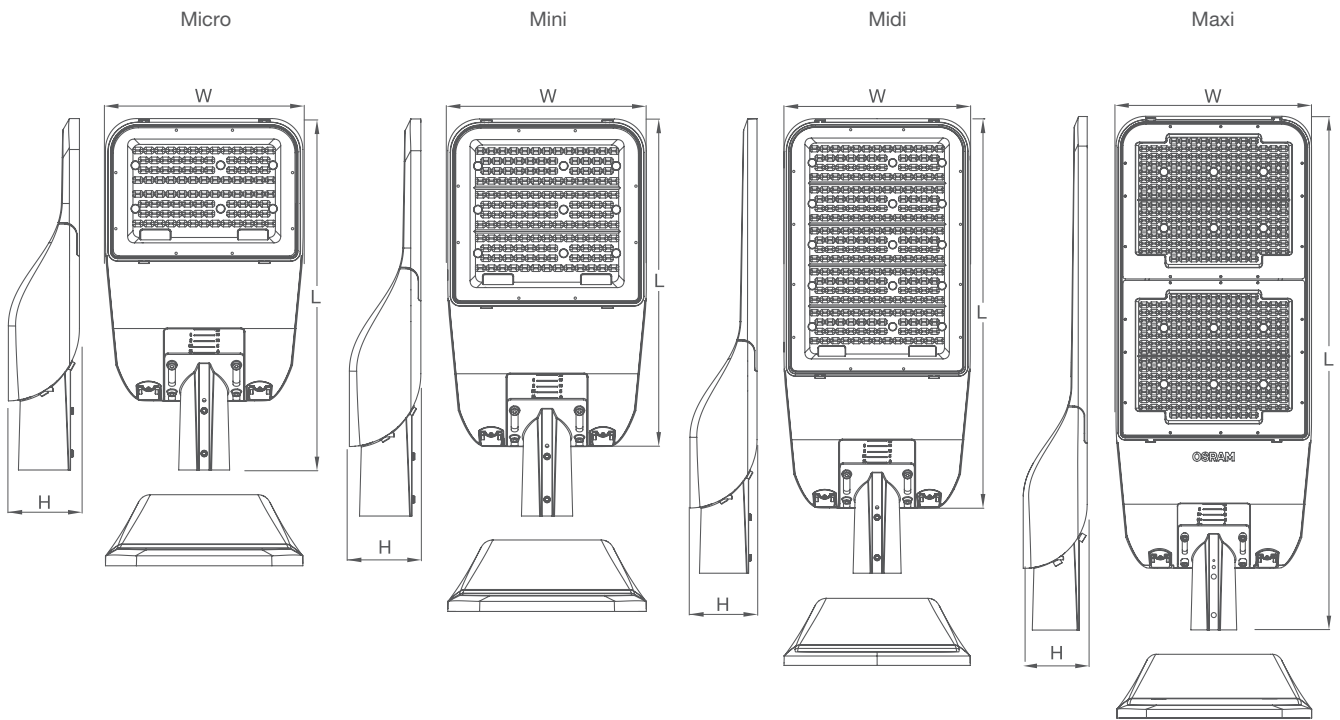

	Micro	Mini	Midi	Maxi
L	534mm	600mm	732mm	867mm
W	300mm	300mm	300mm	330mm
H	108mm	108mm	108mm	108mm

Photometrics

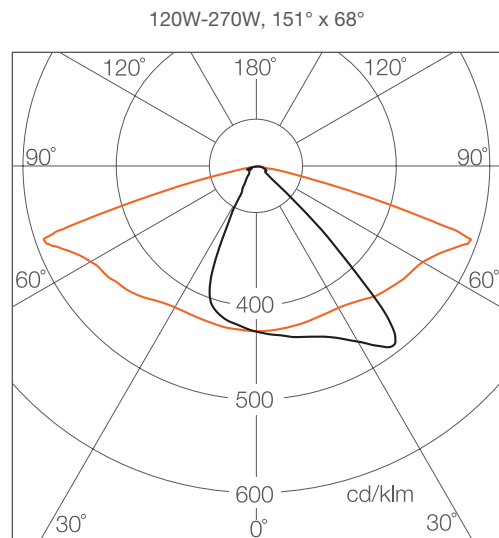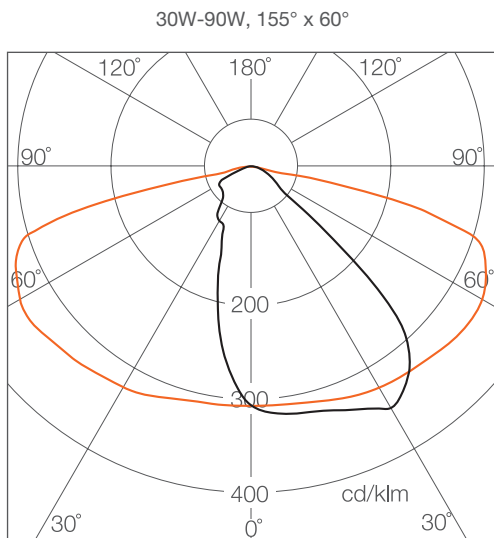

Simplitz® Street Light

Product Reference	Ordering Code (EAN40)		V	W	Hz		K	lm				
Micro												
SIM ST 30W 730 155X60D DIM VS2 AP OSRAM	4062172162401	Warm White	220-240	30	50/60	155 x 60	3000	4200	534	300	108	2
SIM ST 30W 740 155X60D DIM VS2 AP OSRAM	4062172162418	Neutral White	220-240	30	50/60	155 x 60	4000	4200	534	300	108	2
SIM ST 30W 757 155X60D DIM VS2 AP OSRAM	4062172161053	Cold White	220-240	30	50/60	155 x 60	5700	4200	534	300	108	2
SIM ST 60W 730 155X60D DIM VS2 AP OSRAM	4062172162425	Warm White	220-240	60	50/60	155 x 60	3000	8400	534	300	108	2
SIM ST 60W 740 155X60D DIM VS2 AP OSRAM	4062172162432	Neutral White	220-240	60	50/60	155 x 60	4000	8400	534	300	108	2
SIM ST 60W 757 155X60D DIM VS2 AP OSRAM	4062172161060	Cold White	220-240	60	50/60	155 x 60	5700	8400	534	300	108	2
Mini												
SIM ST 90W 730 155X60D DIM VS2 AP OSRAM	4062172162364	Warm White	220-240	90	50/60	155 x 60	3000	12600	600	300	108	2
SIM ST 90W 740 155X60D DIM VS2 AP OSRAM	4062172162395	Neutral White	220-240	90	50/60	155 x 60	4000	12600	600	300	108	2
SIM ST 90W 757 155X60D DIM VS2 AP OSRAM	4062172161077	Cold White	220-240	90	50/60	155 x 60	5700	12600	600	300	108	2
Midi												
SIM ST 120W 730 151X68D DIM VS1 AP OSRAM	4062172162371	Warm White	220-240	120	50/60	151 x 68	3000	16800	732	300	108	1
SIM ST 120W 740 151X68D DIM VS1 AP OSRAM	4062172162449	Neutral White	220-240	120	50/60	151 x 68	4000	16800	732	300	108	1
SIM ST 120W 757 151X68D DIM VS1 AP OSRAM	4062172161084	Cold White	220-240	120	50/60	151 x 68	5700	16800	732	300	108	1
SIM ST 150W 730 151X68D DIM VS1 AP OSRAM	4062172162388	Warm White	220-240	150	50/60	151 x 68	3000	21000	732	300	108	1
SIM ST 150W 740 151X68D DIM VS1 AP OSRAM	4062172162456	Neutral White	220-240	150	50/60	151 x 68	4000	21000	732	300	108	1
SIM ST 150W 757 151X68D DIM VS1 AP OSRAM	4062172161091	Cold White	220-240	150	50/60	151 x 68	5700	21000	732	300	108	1
Maxi												
SIM ST 180W 730 151X68D DIM VS1 AP OSRAM	4062172162463	Warm White	220-240	180	50/60	151 x 68	3000	25200	867	330	108	1
SIM ST 180W 740 151X68D DIM VS1 AP OSRAM	4062172162470	Neutral White	220-240	180	50/60	151 x 68	4000	25200	867	330	108	1
SIM ST 180W 757 151X68D DIM VS1 AP OSRAM	4062172161107	Cold White	220-240	180	50/60	151 x 68	5700	25200	867	330	108	1
SIM ST 210W 730 151X68D DIM VS1 AP OSRAM	4062172162487	Warm White	220-240	210	50/60	151 x 68	3000	29400	867	330	108	1
SIM ST 210W 740 151X68D DIM VS1 AP OSRAM	4062172162494	Neutral White	220-240	210	50/60	151 x 68	4000	29400	867	330	108	1
SIM ST 210W 757 151X68D DIM VS1 AP OSRAM	4062172161114	Cold White	220-240	210	50/60	151 x 68	5700	29400	867	330	108	1
SIM ST 240W 730 151X68D DIM VS1 AP OSRAM	4062172162500	Warm White	220-240	240	50/60	151 x 68	3000	33600	867	330	108	1
SIM ST 240W 740 151X68D DIM VS1 AP OSRAM	4062172162517	Neutral White	220-240	240	50/60	151 x 68	4000	33600	867	330	108	1
SIM ST 240W 757 151X68D DIM VS1 AP OSRAM	4062172161121	Cold White	220-240	240	50/60	151 x 68	5700	33600	867	330	108	1
SIM ST 270W 730 151X68D DIM VS1 AP OSRAM	4062172162524	Warm White	220-240	270	50/60	151 x 68	3000	37800	867	330	108	1
SIM ST 270W 740 151X68D DIM VS1 AP OSRAM	4062172162531	Neutral White	220-240	270	50/60	151 x 68	4000	37800	867	330	108	1
SIM ST 270W 757 151X68D DIM VS1 AP OSRAM	4062172161138	Cold White	220-240	270	50/60	151 x 68	5700	37800	867	330	108	1

Technical data subject to variation and change without notice.

OSRAM Lighting Solutions Asia Pacific

Sales enquiry: lighting.solutions.apac@osram.com
www.osram.asia/ls

